

BULLDOZER

VAN TUNEN – BULLDOZER D8 (LGP)

Operating
weight

± 38 tons



Van Tunen Contractor and Rental BV
Zuiderkade 9, 1948NG Beverwijk NL
+31 251 26 44 44 | info@vantunen.nl
www.vantunen.nl



BULLDOZER

VAN TUNEN – BULLDOZER D8 (LGP)

OVERVIEW

The Cat D8T dozer has a long history of best-in-class versatility and productivity. Because it excels across a wide range of dozing tasks, customers choose D8T dozers for everything from dozing, ripping, scraper work and land clearing to rough finish grading. And with features designed for even greater comfort, productivity and fuel efficiency, today's D8T does even more to help you meet your business objectives.

PORTFOLIO



Working @ All over the world



Working @ Reclamation

BULLDOZER

VAN TUNEN – BULLDOZER D8 (LGP)



FACTS & FIGURES

GENERAL INFORMATION

Engine power: 255KW | 328hp
Fuel consumption: ± 35-45 ltr/hr
Production: Contact us




SHIPPING INFORMATION



Dimensions

All dimensions are approximate.

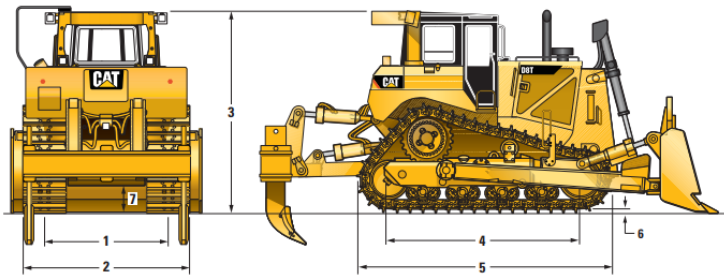

	Standard		Non-Suspended		LGP*	
1 Track Gauge	2083 mm	82.0 in	2083 mm	82.0 in	2337 mm	92.0 in
2 Width of Tractor						
Over Trunnions	3057 mm	120.4 in	3057 mm	120.4 in	3311 mm	130.4 in
Without Trunnions (Standard shoe width)	2693 mm	106.0 in	2693 mm	106.0 in	3302 mm	130.0 in
3 Machine Height**, from Tip of Grouser						
Exhaust Stack	3472 mm	136.7 in	3463 mm	136.3 in	3295 mm	129.7 in
EROPS (to top of railing)	3566 mm	140.4 in	3575 mm	140.7 in	3566 mm	140.4 in
4 Length of Track on Ground	3206 mm	126.2 in	3258 mm	128.3 in	3206 mm	126.2 in
5 Length of Basic Tractor (tag link trunnion to tip of rear grouser)	4647 mm	183.0 in	4647 mm	183.0 in	4647 mm	183.0 in
With the following attachments add:						
Ripper – Single Shank (with tip at ground line)	1519 mm	59.8 in	1519 mm	59.8 in	N/A	
Ripper – Multi Shank (with tip at ground line)	1613 mm	63.5 in	1613 mm	63.5 in	N/A	
SU Blade	1844 mm	72.6 in	1844 mm	72.6 in	1844 mm	72.6 in
U Blade	2241 mm	88.2 in	2241 mm	88.2 in	N/A	
A Blade (not angled)	2027 mm	79.8 in	2027 mm	79.8 in	N/A	
A Blade (angled 25 degrees)	3068 mm	120.8 in	3068 mm	120.8 in	N/A	
Drawbar	406 mm	16.0 in	406 mm	16.0 in	406 mm	16.0 in
6 Height of Grouser	78 mm	3.1 in	78 mm	3.1 in	78 mm	3.1 in
7 Ground Clearance	613 mm	24.1 in	606 mm	23.8 in	613 mm	24.1 in

*Standard shoe width of D8T LGP with non-suspended undercarriage is 965 mm (38 in).

**When Cat Grade Control 3D antennas are installed, overall machine height increases by approximately 82 mm/3.2 in.

TOOL	SPECS
Shipping height	± 3.5m
Shipping Length	± 4.7m
Shipping width (965mm tracks)	± 3.3m
Ground clearance	± 0.61m
Ground pressure	± 0.54kg/cm³
Max. weight	± 38 tons

SPECIALTIES



- Technical Support Van Tunen.
- Operational
 - (Wide) range of blades (coal/sand/rock).
 - Undercarriage (a.o. LGP).
 - Rear implement (a.o. ripper, winch)
 - Multiple Track options

BULLDOZER

VAN TUNEN – BULLDOZER D8 (LGP)

Product Safety has been and continues to be proactive in developing machines that meet or exceed safety standards. Safety is an integral part of all machines and system designs.

Safety Features

- Convenient steps, handles and guardrail help you get on and off the tractor with greater ease. Access lighting can be turned on from a ground level switch.
- New seat belt indicator enhances safety by reminding the operator to buckle up with a light/alarm. Once the machine is in gear, a fault code will register through Product Link if the operator fails to fasten the seat belt.
- Electronic fluid level verification at startup for coolant, power train and engine oil means you can make fewer trips up and down from the cab.
- A standard Operator Presence detection system allows the machine to idle when the operator is not seated, but locks out the power train and front implements to avoid unintentional movement.
- A rear vision camera and cylinder mounted mirrors are available to enhance visibility around the machine.
- Backup alarm.

“Safety First”
QHSE