

WHEELLOADER

VAN TUNEN – WHEELLOADER 988

Bucket

± 4.7-17m³

**Operating
weight**

± 51 tons

Van Tunen Contractor and Rental BV
Zuiderkade 9, 1948NG Beverwijk NL
+31 251 26 44 44 | info@vantunen.nl
www.vantunen.nl



WHEELLOADER

VAN TUNEN – WHEELLOADER 988



OVERVIEW

Move more – All day – Every day. The CAT988 designed with durability built in, ensuring maximum availability through multiple life cycles. With optimized performance and simplified serviceability, our machines allow you to move more material efficiently and safely at a lower cost per ton.

Do more jobs with one machine and equip this wheelloader with a.o.:

- Quick coupler
- Forks
- Sand bucket
- Skeleton buckets
- Rock buckets

PORTFOLIO



Working @ All over the world


WHEELLOADER

VAN TUNEN – WHEELLOADER 988



Dimensions

All dimensions are approximate.

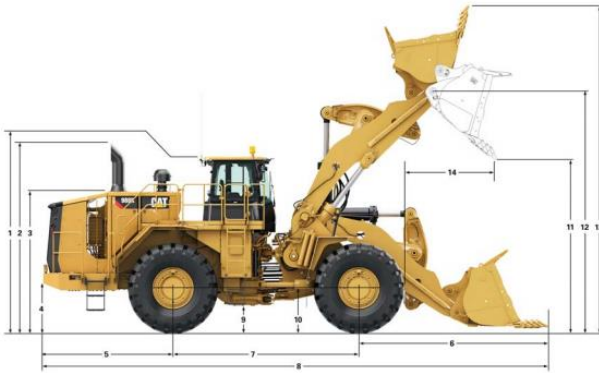

	Standard Lift		High Lift	
	mm	ft	mm	ft
1 Ground to Top of ROPS	4187 mm	13.7 ft	4187 mm	13.7 ft
2 Ground to Top of Exhaust Stack (Tier 4)	4498 mm	14.8 ft	4498 mm	14.8 ft
Ground to Top of Exhaust Stack (LRC)	4199 mm	13.8 ft	4199 mm	13.8 ft
3 Ground to Top of Hood	3334 mm	10.9 ft	3334 mm	10.9 ft
4 Ground to Bumper Clearance	933 mm	3.1 ft	933 mm	3.1 ft
5 Rear Axle Center Line to Bumper	3187 mm	10.5 ft	3187 mm	10.5 ft
6 Front Axle Center Line to Bucket Tip	4467 mm	14.7 ft	4854 mm	15.9 ft
7 Wheelbase	4550 mm	14.9 ft	4550 mm	14.9 ft
8 Maximum Overall Length	12 204 mm	40.0 ft	12 582 mm	41.3 ft
9 Ground to Lower Hitch Clearance	568 mm	1.9 ft	568 mm	1.9 ft
10 Ground to Center of Front Axle	978 mm	3.2 ft	978 mm	3.2 ft
11 Clearance at Maximum Lift	3445 mm	11.3 ft	3882 mm	12.7 ft
12 B-Pin Height at Maximum Lift	5479 mm	18.0 ft	5881 mm	19.3 ft
13 Maximum Overall Height, Bucket Raised	7455 mm	24.5 ft	7849 mm	25.8 ft
14 Reach at Maximum Lift	2074 mm	6.8 ft	2130 mm	7.0 ft

Note: Specs are calculated with 6.9 m³ (9.0 yd³) rock bucket.



FACTS & FIGURES

GENERAL INFORMATION

Engine power:	432KW 580hp
Bucket capacity:	4.7-17m³
Fuel consumption:	± 35-55 ltr/hr
Production:	Contact us

SHIPPING INFORMATION

TOOL	SPECS
Shipping height	± 4.2m
Shipping Length	± 10.0m
Shipping width	± 3.8m
Ground clearance	± 0.56m
Breakout Force	± 468kN
Max. weight	± 51 tons

SPECIALTIES

- Technical Support Van Tunen.
- Rock-, Sandtyres
- Customized attachments

WHEELLOADER

VAN TUNEN – WHEELLOADER 988

Product Safety has been and continues to be proactive in developing machines that meet or exceed safety standards. Safety is an integral part of all machines and system designs.

Focus on QHSE

- Rotating strobe / flash light
- 3-points of contact access
- Back-up alarms with camera
- Machine Access
- Left and right hand stairs with 45 degree angle enhance safety for operators getting on and off the 988K.
- Continuous walkway with non-skid surfaces are designed into the service areas.

Safety Features

- Cab, pressurized and sound suppressed (ROPS/FOPS)
- Ergonomic cab access ladders and handrails
- Mirrors, heated rearview external with integrated spod mirrors
- Steering, EH joystick, speed sensing with force feedback
- Sun visor, rear
- Windows with full guards front, rear and sides
- Lighting system: – Four halogen work lights (cab mounted)
 - Two LED stop, turn, tail lights
 - Two halogen roading lights (with signals)
 - Two halogen rear vision lights (hood mounted)
- Alarm, back-up
- Brakes, full hydraulic enclosed wet-disc with Integrated Braking System (IBS) incl. Brake wear indicators

**“Safety First”
QHSE**