

BULLDOZER

VAN TUNEN D8 (LGP)



Rather have the digital version? Go to:

WWW.VANTUNEN.NL/RENTAL

BULLDOZER



OPERATING WEIGHT
± 38 TONS

OVERVIEW

The Cat D8T dozer has a long history of best-in-class versatility and productivity. Because it excels across a wide range of dozing tasks, customers choose D8T dozers for everything from dozing, ripping, scraper work and land clearing to rough finish grading. And with features designed for even greater comfort, productivity and fuel efficiency, today's D8T does even more to help you meet your business objectives.

PORTFOLIO



Working at: all over the world.



Working at: reclamation.

FACTS & FIGURES



GENERAL INFORMATION



INFO	SPECS
Engine power	255KW 328hp
Fuel consumption	± 35-45 ltr/hr
Production	Contact us


SHIPPING INFORMATION



TOOL	SPECS
Shipping height	± 3.5m
Shipping Length	± 4.7m
Shipping width (965mm tracks)	± 3.3m
Ground clearance	± 0.61m
Ground pressure	± 0.54kg/cm ³
Max. weight	± 38 tons

DIMENSIONS

All dimensions are approximate.

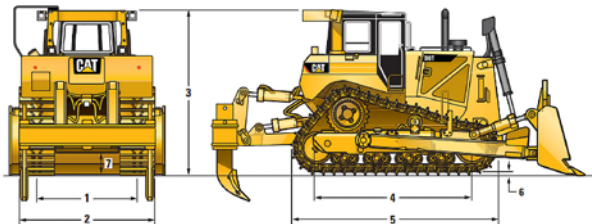

SPECIALTIES



- Technical Support
Van Tunen
- Operational
 - (Wide) range of blades (coal/sand/ rock)
 - Undercarriage (a.o. LGP)
 - Rear implement (a.o. ripper, winch)
 - Multiple Track options

	Standard		Non-Suspended		LGP*	
1 Track Gauge	2083 mm	82.0 in	2083 mm	82.0 in	2337 mm	92.0 in
2 Width of Tractor						
Over Trunnions	3057 mm	120.4 in	3057 mm	120.4 in	3311 mm	130.4 in
Without Trunnions (Standard shoe width)	2693 mm	106.0 in	2693 mm	106.0 in	3302 mm	130.0 in
3 Machine Height**, from Tip of Grouser						
Exhaust Stack	3472 mm	136.7 in	3463 mm	136.3 in	3295 mm	129.7 in
EROPS (to top of railing)	3566 mm	140.4 in	3575 mm	140.7 in	3566 mm	140.4 in
4 Length of Track on Ground	3206 mm	126.2 in	3258 mm	128.3 in	3206 mm	126.2 in
5 Length of Basic Tractor (tag link trunnion to tip of rear grouser)	4647 mm	183.0 in	4647 mm	183.0 in	4647 mm	183.0 in
With the following attachments add:						
Ripper – Single Shank (with tip at ground line)	1519 mm	59.8 in	1519 mm	59.8 in	N/A	
Ripper – Multi Shank (with tip at ground line)	1613 mm	63.5 in	1613 mm	63.5 in	N/A	
SU Blade	1844 mm	72.6 in	1844 mm	72.6 in	1844 mm	72.6 in
U Blade	2241 mm	88.2 in	2241 mm	88.2 in	N/A	
A Blade (not angled)	2027 mm	79.8 in	2027 mm	79.8 in	N/A	
A Blade (angled 25 degrees)	3068 mm	120.8 in	3068 mm	120.8 in	N/A	
Drawbar	406 mm	16.0 in	406 mm	16.0 in	406 mm	16.0 in
6 Height of Grouser	78 mm	3.1 in	78 mm	3.1 in	78 mm	3.1 in
7 Ground Clearance	613 mm	24.1 in	606 mm	23.8 in	613 mm	24.1 in

*Standard shoe width of D8T LGP with non-suspended undercarriage is 965 mm (38 in).

**When Cat Grade Control 3D antennas are installed, overall machine height increases by approximately 82 mm/3.2 in.

SAFETY FIRST - QHSE



Product Safety has been and continues to be proactive in developing machines that meet or exceed safety standards. Safety is an integral part of all machines and system designs.

SAFETY FEATURES

- Convenient steps, handles and guardrail help you get on and off the tractor with greater ease. Access lighting can be turned on from a ground level switch
- New seat belt indicator enhances safety by reminding the operator to buckle up with a light/ alarm. Once the machine is in gear, a fault code will register through Product Link if the operator fails to fasten the seat belt
- Electronic fluid level verification at startup for coolant, power train and engine oil means you can make fewer trips up and down from the cab
- A standard Operator Presence detection system allows the machine to idle when the operator is not seated, but locks out the power train and front implements to avoid unintentional movement
- A rear vision camera and cylinder mounted mirrors are available to enhance visibility around the machine
- Backup alarm



REQUIRE THIS MACHINE FOR YOUR PROJECT?

Please contact us for a competitive quotation or for further information about our customized solutions. Feel free to give us a call **+31 251 26 44 44**, send us an e-mail info@vantunen.nl or visit www.vantunen.nl

Experts in coastal development, earthmoving, rock works and mining

Van Tunen provides worldwide rental of heavy earthmoving equipment and technical project support services for the dredging, earthmoving and mining industry as well as the maritime sector. From harbour improvement to coastal protection, from pipeline works to demolition, depend on our team for solid advice, made-to-measure solutions and prompt support.

Get to know us, please visit:

www.vantunen.nl



Contact us

+31 251 26 44 44
info@vantunen.nl
www.vantunen.nl

Visit us

Zuiderkade 9
1948 NG Beverwijk
The Netherlands

About us

Registration nr. 34056786
VAT nr. NL00 706 8797 B01